


T.W.I. TRUCK WORKS INC.

FUEL TRUCKS

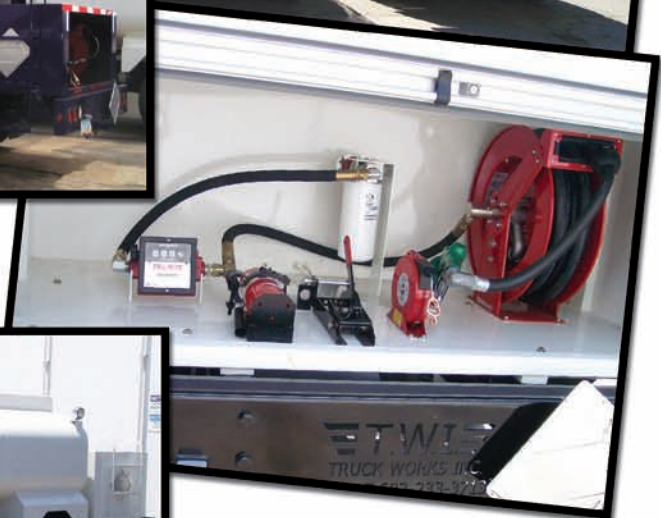

1000-4000 GALLON STEEL SINGLE / MULTIPLE COMPARTMENTS

STANDARD TANK FEATURES:

3/16" A-36 STEEL SHELL, ELLIPTICAL

3/16" A-36 STEEL HEADS, INSET/BREAK DESIGN

3/16" A-36 BAFFLE, INSET/BREAK DESIGN

3/16" A-36 STEEL LONG BAFFLE

3/16" STEEL BELLY PLATE FULL LENGTH WITH WEEP HOLES

HEADS HAVE 4" TO 6" OFFSET WELDED 360 DEGREES INSIDE AND OUT

3/16" A-36 STEEL U-SHAPED SUBFRAME FULL LENGTH OF TANK

3/16" A-36 STEEL ROLL OVER PROTECTION FULL LENGTH OF TANK

1" VULCANIZED RUBBER WEAR PAD BETWEEN TANK AND FRAME

16" BETTS MC406 SEALED MANWAY

ANTI SKID WALKWAY TOP OF TANK

10 GAUGE BONNET STYLE FENDERS WELDED TO TANK

10 GAUGE TEAR PAD FULL LENGTH OF TANK FOR BODY ATTACHMENTS

REAR LADDER WITH SAFETY HANDRAILS

(4) FLAMMABLE PLACARD HOLDERS LOCATED ALL FOUR CORNERS OF VEHICLE

FIVE YEAR LIMITED TANK WARRANTY

ALL TANKS HAVE 1" THICK 80 DUROMETER NEOPRENE RUBBER WEAR PAD
BETWEEN TANK AND CHASSIS THIS IS VULCANIZED TO A 3" WIDE 10 GAUGE
STEEL STRIP

SKIRTBOARD IS TACK WELDED TO SUBFRAME FULL LENGTH OF TANK

4 POINT MOUNTING SYSTEM SOLID TO FRAME

50' X 1" SPRING REWIND REEL LOCATED IN CURB SIDE CABINET

1" AUTO SHUT OFF NOZZLE WITH SWIVEL ON REEL IN CURB SIDE CABINET

FILL RITE 901 METER IN CURB SIDE CABINET

FUEL FILTER MOUNTED IN CURB SIDE CABINET

(1) 2" MANUALLY OPERATED INTERNAL VALVE CONTROLLED FROM TWO LOCATIONS

ALL PLUMBING ON TRUCK TO BE SCHEDULE 40 PIPING

BLACKMER TXD2 2" PTO DRIVEN FUEL PUMP WITH STRAINER

PUMP WILL DELIVER 30 TO 40 GPM THRU 1" HOSE ON REEL

PTO CAB CONTROLLED

1000 SERIES PTO SHAFT TO DRIVE FUEL PUMP

PTO/PUMP TO BE SPEC'D ENGINE IDLE RPM

CONTROL PANEL TO BE LOCATED IN CAB

CAB MOUNTED 5# FIRE EXTINGUISHER

(4) HALOGEN WORK LIGHTS MOUNTED ON TANK, CAB CONTROLLED

STORAGE COMPARTMENT- SEALED AND LIGHTED, WITH GAS SHOCK DOORS TO
HOLD FIRE EXTINGUISHER AND GROUNDING REEL

1/4" MILD STEEL D.O.T. FULL WIDTH REAR BUMPER

REAR ICC BUMPER DOT SPECIFICATIONS

REAR MUD FLAPS



Betts™

FILL-RITE®